

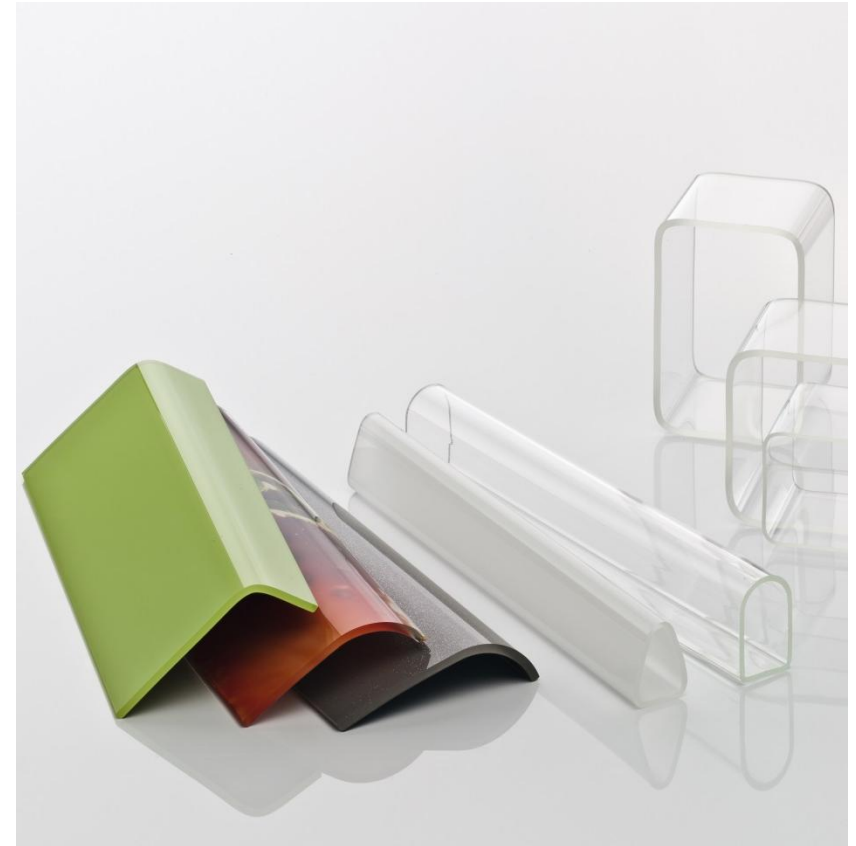


CONTURAX[®] PRO






Product overview

CONTURAX® PRO – minimum order quantities

- Standard dimensions
 - 1 carton
- Special dimensions (successful technical review provided)
 - 500 kg




CONTURAX® PRO – specifications

Profile Type	Profile Number	Dimensions and Tolerances [mm]	Pieces / kg per Carton
	085	W 44.50 ± 1.00 / WT 1.40 ± 0.10 W 67.80 ± 1.50 / WT 2.75 ± 0.25	12 / 12.2 kg 16 / 11.6 kg 4 / 9.2 kg
	086	H 19.00 ± 0.40 / W 53.50 ± 0.50 / WT 1.75 ± 0.15 H 32.40 ± 0.50 / W 54.75 ± 0.75 / WT 1.45 ± 0.10 H 58.00 ± 1.50 / W 86.50 ± 1.50 / WT 2.75 ± 0.25	24 / 15.0 kg 12 / 12.0 kg 6 / 14.5 kg
	089	H 132.70 ± 1.50 / W 138.80 ± 1.50 / WT 2.75 ± 0.25	TBD
	101	H 50.00 / W 100.00 / WT 5.00	6 / 27 kg
	093	H 29.25 / W 21.50 / WT 2.10 H 100.00 / W 96.00 / WT 3.00	24 / 12 kg 4 / 12.4 kg

H: height, W: width, WT: wall thickness, TBD: to be determined

CONTURAX® PRO – specifications

Profile Type	Profile Number	Dimensions and Tolerances [mm]	Pieces / kg per Carton
	098	H 50.00 / W 100.00 / WT 5.00	6 / 27 kg

H: height, W: width, WT: wall thickness

Tubing

SCHOTT AG

Erich-Schott-Strasse 14

95666 Mitterteich

Germany

www.schott.com/tubing/german/special_glass/conturax_pro.html

www.schott.com/tubing/design

Jean Krystkowiak

Phone +49 (0)9633/80-233

Fax +49 (0)9633/80-614

jean.krystkowiak@schott.com